



# OP125 (C)

## SOFT SERVE FREEZER

### Economic 2+1 mixed

Simple and powerful Soft ice cream making machine



Minimum Clearance should be 300mm on left, right, and 400mm rear for assuring adequate air flow




Electrical

One dedicated electrical connection is required. Check with local electrician for cord and receptacle specifications if 50 Hz or 60 Hz Equipment is desired



customization

Product customization may be available upon request

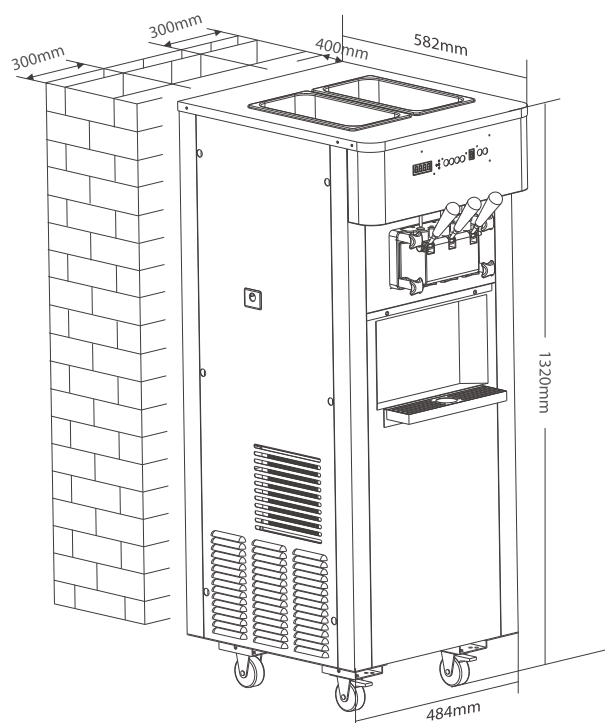

Weight	lbs.	kgs.	
Net	287	130	
Total	353	160	
Dimensions	in.	mm.	
Width	19.06	484	
Depth	22.91	582	
Height	51.97	1320	
Electrical	Maximum Fuze Size	Minimum Ampacity	Poles(P) Wires(W)
220-240/50/1	35	15	2P 3W
220-240/60/1	35	15	2P 3W

These specifications are subject to change without notice as further research and development efforts continuously improve the model.

## SPECIFICATIONS

Flavors	2+1 mixed
Production Capacity	25L/H
Mix Hopper	2*6.5L
Cylinder	2*1.5L
Power	2000W
Main Compressor	1 HP
Cooling System	Air Cooled
Refrigerant	R404A
Voltage	220V 50/60HZ
Motor	1100W
Options	Air Pump/Pre-Cooling
Dimension(mm)	484 *582*1320
Refrigerated Hopper	✓
Standby Mode	✓
Low Mix Indicator Light	✓
Motor Amperage Protection	✓

## Function illustration



### Microprocessor Regulation

- Regulates the entire refrigeration process and maintains consistent product viscosity, adjustable through modifying viscosity between level 1 and level 8 on the front panel.




### Dispensing Counter

- The number of ice creams dispensed is displayed on the front panel each time the discharge handle is pressed.



### Safety Protection

- Shuts down for self protection when motor overload or compressor overheat occurs due to power surge or abnormal voltage from power supply.



### Standby Mode

- The machine automatically enters standby mode after two hours of inactivity and will resume normal operation after any keys or handles are pressed.



### Broad voltage range

- The ice cream machine can apply to broad voltage range from 198V to 238V.